

## Wide Input Voltage Range 20 Watt DC-DC Converter



### FEATURES:

- 20W DIL PACKAGE
- 2:1 WIDE INPUT RANGE
- 100% BURNED IN
- HIGH EFFICIENCY
- UL94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE
- RoHS COMPLIANT
- Remote Control:On/Off



Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Input Voltage	Input Current		Output Voltage	Output Current	Efficiency	Capacitor load
	Vdc	No-Load (mA TYP)	Full Load (mA TYP)	Vdc	Full Load (mA)	%TYP	uF MAX
68D20-12S03RNL	9-18	30	1456	3.3	4500	85	8200
68D20-12S05RNL	9-18	30	1938	5	4000	86	5600
68D20-12S12RNL	9-18	30	1920	12	1670	87	960
68D20-12S15RNL	9-18	30	1911	15	1330	87	680
68D20-12D12RNL	9-18	30	1915	±12	±833	87	470
68D20-12D15RNL	9-18	30	1917	±15	±667	87	330
68D20-24S03RNL	18-36	25	719	3.3	4500	86	8200
68D20-24S05RNL	18-36	25	958	5	4000	87	5600
68D20-24S12RNL	18-36	25	949	12	1670	88	960
68D20-24S15RNL	18-36	25	945	15	1330	88	680
68D20-24D12RNL	18-36	25	947	±12	±833	88	470
68D20-24D15RNL	18-36	25	947	±15	±667	88	330
68D20-48S03RNL	36-75	20	356	3.3	4500	87	8200
68D20-48S05RNL	36-75	20	473	5	4000	88	5600
68D20-48S12RNL	36-75	20	474	12	1670	88	960
68D20-48S15RNL	36-75	20	472	15	1330	88	680
68D20-48D12RNL	36-75	20	473	±12	±833	88	470
68D20-48D15RNL	36-75	20	474	±15	±667	88	330

### Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
<b>Voltage Types</b>				2:1	
<b>Start-up voltage / under voltage shut down</b>	12 Vin		8.7/8.3	9	VDC
	24 Vin		16.9/16.2	18	
	48 Vin		33.0/30.5	36	VDC
<b>Surge voltage (100 msec. max.)</b>	12 Vin			25	V
	24 Vin			50	
	48 Vin			100	V
<b>Reflected input ripple current</b>			30		mA
<b>Filter</b>	LC Network				
<b>Protection</b>	Fuse Recommended				



### Output Specifications


Parameters	Conditions	Min	Typ	Max	Units
<b>Voltage Tolerance</b>				±2	%
<b>Output voltage adj. range</b>	only for single output models			±10	%
<b>Line Regulation (Vmin – Vmax)</b>	single output			0.5	%
	dual output			0.5	%
<b>Load Regulation (25 – 100 %)</b>	single output			0.5	%
	dual output models balanced load			1.0	%
<b>Load variation(25%/100%)</b>	dual output models unbalanced load			5.0	%
<b>Minimum load</b>	required	0		10	%
<b>Ripple and noise(20 MHz bandwidth)</b>	with external capacitor (See Note 1)			100	mVp-p
<b>Temperature coefficient</b>			±0.05		%/°C
<b>Output current limitation</b>			at 150 % of Iout max., constant current		
<b>Short circuit protection</b>			Hiccup (automatic recovery)		
<b>Over voltage protection</b>	3.3VDC	3.7		5.4	Vout
	5VDC	5.6		7.0	Vout
	12VDC	13.5		19.6	Vout
	15VDC	16.8		20.5	Vout
<b>Start up time</b>	nominal Vin and constant resistive load		450		ms
<b>Transient response setting time</b>	25% load step change		300		us

## Wide Input Voltage Range 20 Watt DC-DC Converter

General Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Temperature ranges	Operating(with derating)	-40		+75	°C
	Case temperature			105	°C
	Storage	-55		+125	°C
Humidity	non condensing	5		95	%
Reliability, calculated MTBF	MIL-HDBK-217F, @ +25° C, ground benign	340000			Hours
Isolation voltage	For 60 seconds(Input/Output)			1500	VDC
Isolation capacity	Input/Output		1000		pF
Isolation resistance	Input/Output (500 VDC)	1000			MΩ
Remote On/Off	On	3.0 ~ 15 VDC or open circuit			
	Off	0 ~ 1.2 VDC or short circuit pin 6 and pin 2			
	Off idle current:		2.5		mA
Switching frequency (fixed)			330		KHz
Vibration and thermal shock		MIL-STD-810E			
Safety standards		EN 60950-1, IEC 60950-1			
Case material		nickel coated copper			
Base material		Non-conductive FR4			
Potting material		epoxy (UL 94V-0 rated)			
Weight		15 g (0.53 oz)			
Soldering temperature		max. 265°C / 10sec			
EMI (Conducted&Radiation)		EN55022 Class A			


Note : 1 Ripple & Noise measurement bandwidth is 20 MHz, measured with a 1uF M/C and a 10uF T/C.

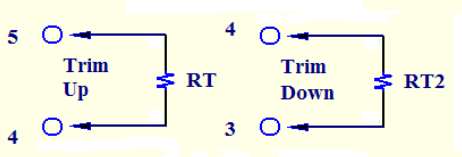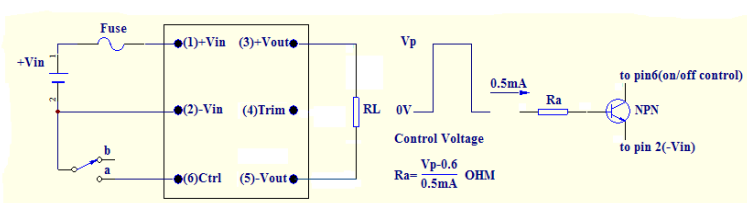Output Voltage Adjustment	Control Pin Suggest Circuit
<p>Output can be externally trimmed by using the method shown below.</p> 	 <p style="font-size: small;">When pin6 short to pin2,D/D ON=&gt;OFF When pin6 leave open,D/D =&gt; ON</p>

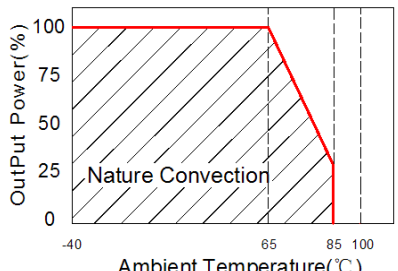Temperature Derating Graph	Part Number
	<p style="text-align: center;"><b>68D20 - <u>12</u> <u>S</u> <u>05</u> <u>R</u> <u>NL</u></b></p> <p style="text-align: center;">A B C D E F</p> <p>A : Series            B : Input Voltage            C : (S)Single,(D)Dual Output            D : Output Voltage            E : Regulated(R)            F : RoHs Version</p>

**Wide Input Voltage Range 20 Watt DC-DC Converter**


**EMC Considerations**

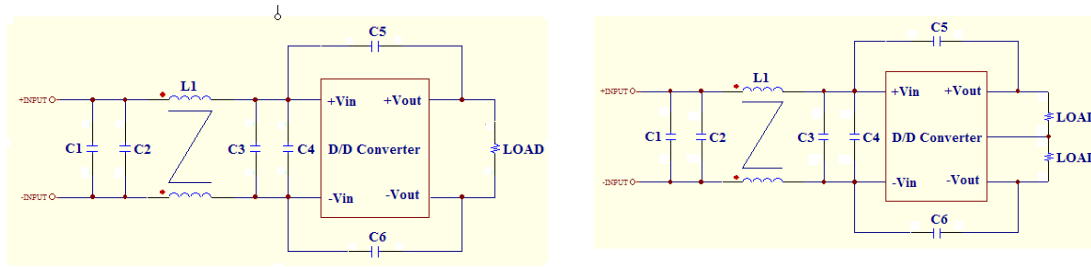

Suggested Schematic to comply with EN55022 Conducted Noise emission Class B


Following components are needed to comply with EN55022 Class B conducted noise:

68D20-12S(D)xxRNL 68D20-24S(D)xxRNL				68D20-48S(D)xxRNL			
Componet	Value	Voltage	Reference	Componet	Value	Voltage	Reference
C1,C2,C3	6.8uF	50V	1812 MLCC	C1,C2,C3,C4	2.2uF	100V	1812 MLCC
C5,C6	1000pF	2KV	1206 MLCC	C5,C6	1000pF	2KV	1206 MLCC
L1	325uH		Common Mode Choke	L1	260uH		Common Mode Choke

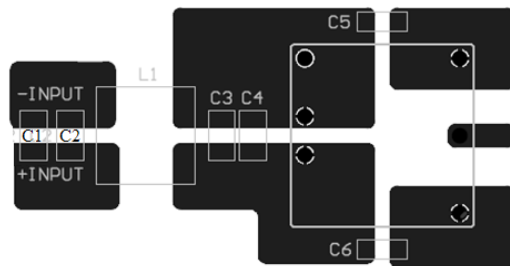

Recommended Layout with input Filter

**Markings and dimensions**

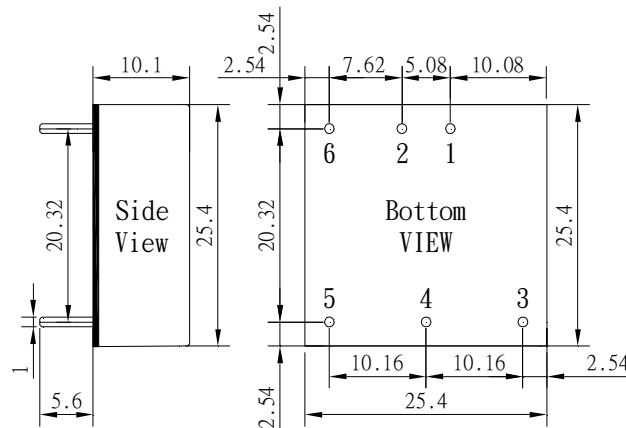

UNIT:mm XX.X±0.5 XX.XX±0.25(Pin Size Tolerance: Φ1.0 ±0.05mm)

**PIN Connection**

PIN	1	2	3	4	5	6
SINGLE	+Vin	-Vin	+Vout	Trim	-Vout	Ctrl ON/OFF
DUAL	+Vin	-Vin	+Vout	Com	-Vout	Ctrl ON/OFF