

1W, Fixed input voltage, isolated & regulated single output

FEATURES

- | Continuous short circuit protection
- | Operating temperature range: -40°C to +85°C
- | Isolation voltage: 3K VDC
- | Ultra Compact package
- | International standard pin-out
- | Compatible with DCP01 Series



Patent Protection RoHS

IF\_RN-1W & IF\_RT-1W series is specially designed for applications where an isolated voltage is required in a distributed power supply system. It is suitable for

1. Where the voltage of the input power supply is stable (voltage variation:  $\pm 5\%V_{in}$ );
2. Where isolation is necessary between input and output (isolation voltage  $\leq 3000VDC$ );
3. Where do not has high requirement of line regulation, load regulation and the ripple & noise of the output voltage;  
Such as: pure digital circuits, low frequency analog circuits, and IGBT power device driving circuits.

Selection Guide

| Part No.    | Input Voltage (VDC) | Output               |                                | Efficiency (% Min./Typ.) @ Full Load | Max. Capacitive Load ( $\mu F$ ) |
|-------------|---------------------|----------------------|--------------------------------|--------------------------------------|----------------------------------|
|             | Nominal (Range)     | Output Voltage (VDC) | Output Current (mA)(Max./Min.) |                                      |                                  |
| IF0505RN-1W | 5<br>(4.75-5.25)    | 5                    | 200/20                         | 66/70                                | 220                              |
| IF0505RT-1W |                     | 5                    | 200/20                         | 66/70                                | 220                              |
| IF1205RN-1W | 12<br>(11.4-12.6)   | 5                    | 200/20                         | 68/72                                | 220                              |
| IF1205RT-1W |                     | 5                    | 200/20                         | 68/72                                | 220                              |

Input Specifications

| Item                                | Operating Conditions | Min. | Typ.   | Max. | Unit |
|-------------------------------------|----------------------|------|--------|------|------|
| Input Current (full load / no-load) | 5V input             | --   | 285/25 | --   | mA   |
|                                     | 12V input            | --   | 115/20 | --   |      |
| Surge Voltage (1sec. max.)          | 5V input             | -0.7 | --     | 9    | VDC  |
|                                     | 12V input            | -0.7 | --     | 18   |      |
| Input Filter                        | Capacitor filter     |      |        |      |      |

Output Specifications

| Item                            | Operating Conditions            | Min. | Typ. | Max.       | Unit  |
|---------------------------------|---------------------------------|------|------|------------|-------|
| Output Voltage Accuracy         |                                 | --   | --   | $\pm 3$    | %     |
| Line Regulation                 | Input voltage change: $\pm 5\%$ | --   | --   | $\pm 0.25$ |       |
| Load Regulation                 | 10%-100% load                   | --   | --   | $\pm 1$    |       |
| Ripple *                        | 20MHz bandwidth                 | --   | 10   | 20         | mVp-p |
| Noise *                         |                                 | --   | 50   | 75         |       |
| Temperature Drift Coefficient   | 100% load                       | --   | --   | $\pm 0.03$ | %/°C  |
| Output Short Circuit Protection | Continuous, self-recovery       |      |      |            |       |

Note: \* Ripple and noise tested with "parallel cable" method, please see DC-DC Converter Application Notes for specific operation methods.

General Specifications

| Item                    | Operating Conditions   | Min. | Typ. | Max. | Unit       |
|-------------------------|--|------|------|------|------------|
| Isolation Voltage       | Input-output, with the test time of 1 minute and the leak current lower than 1mA | 3000 | --   | --   | VDC        |
| Isolation Resistance    | Input-output, isolation voltage 500VDC   | 1000 | --   | --   | M $\Omega$ |
| Isolation Capacitance   | Input-output, 100KHz/0.1V  | --   | 25   | --   | pF         |
| Operating Temperature   | Derating if the temperature $\geq 71^\circ C$ , (see Fig. 1)                     | -40  | --   | 85   | °C         |
| Storage Temperature     |  | -55  | --   | 125  |            |
| Casing Temperature Rise | Ta=25° C   | --   | 15   | 25   |            |

|                                    |  |   |     |     |         |
|------------------------------------|--|---|-----|-----|---------|
| Pin Welding Resistance Temperature | Welding spot is 1.5mm away from the casing, 10 seconds | --  | --  | 250 | ° C     |
| Reflow Soldering Temperature       |  | Peak temp. ≤245°C, maximum duration time ≤60s at 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1. |     |     |         |
| Storage Humidity                   | Non-condensing   | --  | --  | 95  | %       |
| Switching Frequency                | 100% load, nominal input voltage                       | --  | 100 | --  | KHz     |
| MTBF                               | MIL-HDFK-217F@25° C                                    | 3500  | --  | --  | K hours |

## Physical Specifications

|                    |  |                    |  |  |  |
|--------------------|--|--------------------|--|--|--|
| Casing Material    | Black flame-retardant heat-proof epoxy resin (UL94-V0) |                    |  |  |  |
| Package Dimensions | IF_RN-1W   | 19.50*9.50*4.68mm  |  |  |  |
|                    | IF_RT-1W   | 19.50*10.53*5.00mm |  |  |  |
| Weight             | 1.4 g (Typ.)   |                    |  |  |  |
| Cooling Method     | Free air convection                                    |                    |  |  |  |

## Product Characteristic Curve

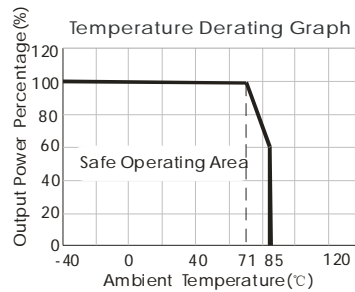




Fig. 1

## Design Reference

### 1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.2. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Fig.3).

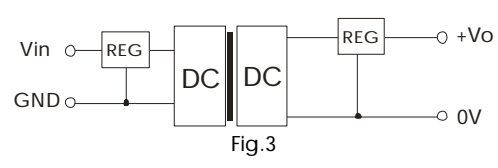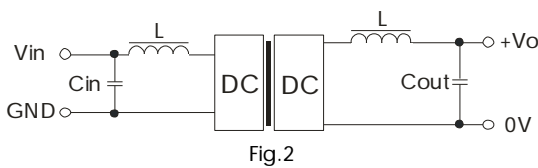

Recommended capacitive load value table (Table 1)

| Vin (VDC) | Cin (μF) | Vout (VDC) | Cout (μF) |
|-----------|----------|------------|-----------|
| 5         | 4.7      | 5          | 4.7       |
| 12        | 2.2      | --         | --        |

It is not recommended to connect any external capacitor when output power is less than 0.5W.

### 2. Output load requirements



To ensure the module work efficiently and reliably, during the operation, the min. output load should be no less than 10% of the full load. If the actual output power is low, please connect a resistor to the output terminal in parallel, with a recommended resistance which is 10% of the rated power, and derating is required during operation.

### 3. For more information Please find the application notes on [www.mornsun-power.com](http://www.mornsun-power.com)


Dimensions and Recommended Layout

IF\_RN-1W series

THIRD ANGLE PROJECTION 

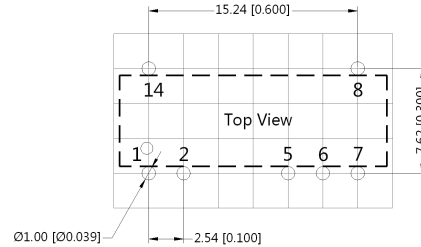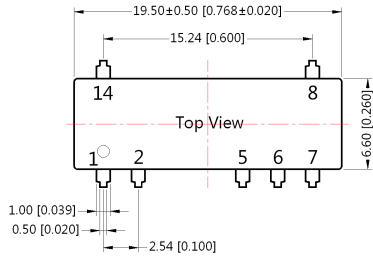

Note: Grid 2.54\*2.54mm

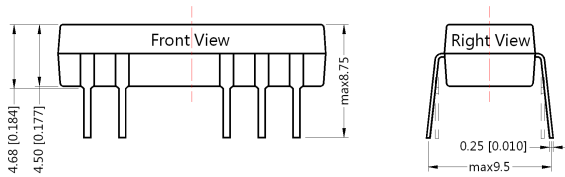



Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.25[\pm 0.010]$

| Pin-Out |          |
|---------|----------|
| Pin     | Function |
| 1       | Vin      |
| 2       | GND      |
| 5       | 0V       |
| 6       | +Vo      |
| Others  | NC       |

NC: No Connection

IF\_RT-1W series

THIRD ANGLE PROJECTION 

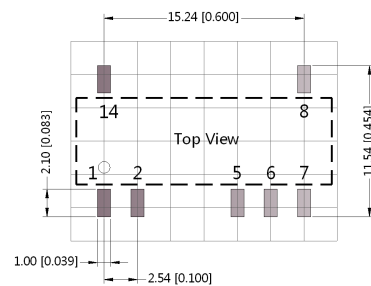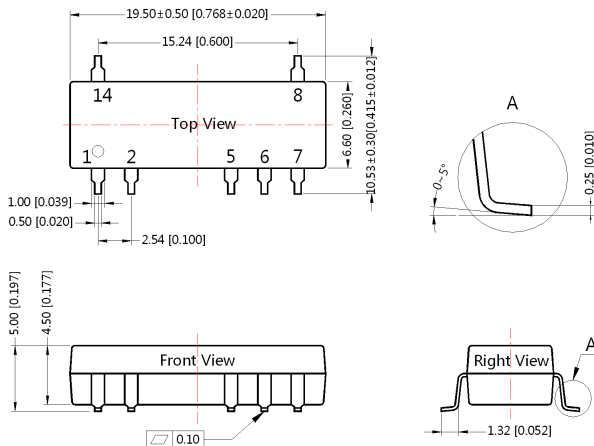

Note: Grid 2.54\*2.54mm

Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.25[\pm 0.010]$

| Pin-Out |          |
|---------|----------|
| Pin     | Function |
| 1       | Vin      |
| 2       | GND      |
| 5       | 0V       |
| 6       | +Vo      |
| Others  | NC       |

NC: No Connection

Notes:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58200027;
2. If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in this datasheet;
3. The max. capacitive load should be tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, data in this data sheet should be tested under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% when inputting nominal voltage and outputting rated load;
5. All index testing methods in this datasheet are based on our Company's corporate standards;
6. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
7. We can provide product customization service;
8. Specifications of this product are subject to changes without prior notice.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China

Tel: 86-20-38601850-8801

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)