



SUNYUAN PARTNO	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYPE.)
B0503D-1W	5	14	363	3.3	303	72
B0505D-1W	5	16	266	5	200	75
B0512D-1W	5	18	254	12	84	70
B1205D-1W	12	11	119	5	200	70
B1212D-1W	12	10	104	12	84	80
B1215D-1W	12	15	107	15	68	78
B2405D-1W	24	5	55	5	200	75
B2412D-1W	24	7	54	12	84	77
B2415D-1W	24	8	55	15	76	76

BXXXXD-1W
1KV ISOLATION, 1W OUTPUT, UNREGULATED, DIP 8 PACKAGE, MTBF>1M HOURS

Dimensions

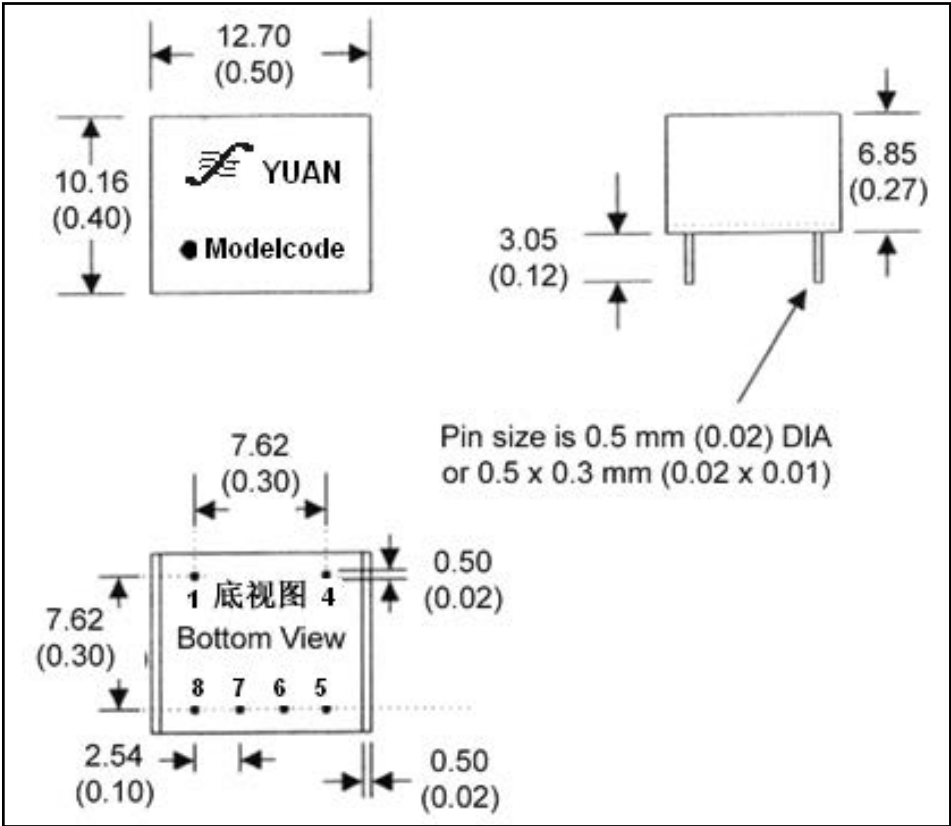

Derating Graph and Pinning

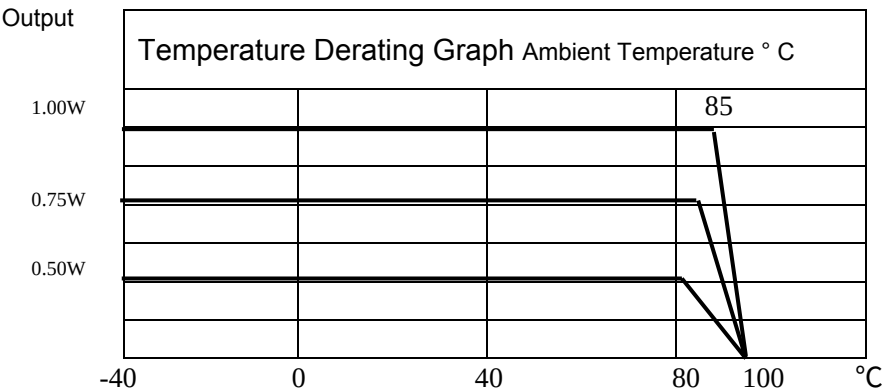

Pin	Connection		
1	-	Vin	Input
2			Omitted
3			Omitted
4	+	Vin	Input
5	+	Vout	Output
6			Omitted
7	0	Vout	Output
8			Omitted